


Knurled thumb nuts

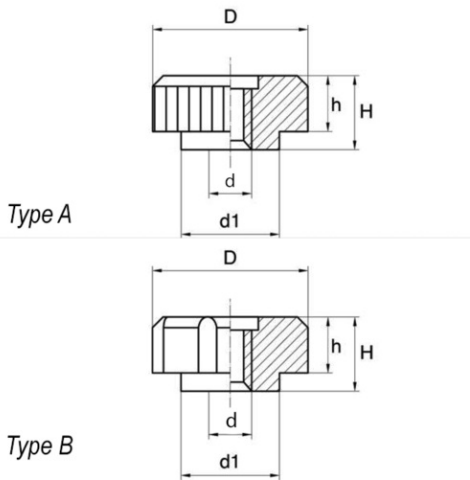

Details du produit

Description

Knurled thumb nuts are offered in two types, fine knurl (form A) or six lobed grip (form B). Both types come with a shoulder to lift the head clear of the component surface to enable an easier grip with finger and thumb during use.

Advantages

Lightweight and non corrosive with all the advantages offered by polyamide (nylon) including a working temperature range of -30C to +100C

Qualities

A range of dimensions are available for each thread size.

usage

For frequent use applications which only require minimal torque and hand fastening.

d	d1	D	h	H	Minimum sales Quantity	SKU
M3	8,5	12,0	3,5	5,0	1000	2503C
M4	10,0	20,0	6,0	7,5	1000	25041C
M4	10,0	16,0	4,5	6,0	1000	2504C
M5	10,0	19,0	6,0	7,5	1000	25051C
M5	10,0	16,0	4,5	6,0	1000	2505C
M6	10,0	19,0	6,0	7,5	1000	25061C
M6	10,0	16,0	4,5	6,0	1000	2506C

d	dI	D	h	H	Minimum sales Quantity	SKU
M8	13,0	24,0	6,0	7,5	1000	2508C
M4	8,5	14,0	3,5	5,0	1000	2514C
M4	10,0	20,0	5,0	6,5	1000	26041C
M4	10,0	16,0	4,5	6,5	1000	2604C
M5	10,0	20,0	5,0	6,5	1000	26051C
M5	10,0	16,0	4,5	6,0	1000	2605C
M6	10,0	20,0	6,0	7,8	1000	26061C
M6	10,0	16,0	4,5	6,0	1000	2606C
M6	10,0	24,0	5,7	7,5	1000	2626C
M3	7,0	12,0	3,5	7,0	1000	3503C
M4	9,5	16,0	4,5	8,0	1000	35041C
M4	7,0	12,0	3,5	7,0	1000	3504C
M5	13,0	19,0	6,0	11,0	1000	35051C
M5	9,5	16,0	4,5	8,0	1000	3505C
M6	13,0	20,0	6,0	11,0	1000	35061C
M6	9,5	16,0	4,5	8,0	1000	3506C
M5	8,8	14,0	3,5	7,0	1000	3515C
M4	9,5	16,0	4,5	8,0	1000	3604C
M5	9,5	16,0	4,5	8,0	1000	3605C
M6	9,5	16,0	4,5	8,0	1000	3606C
M5	10,0	24,0	5,7	7,5	1000	3615C

d	dI	D	h	H	Minimum sales Quantity	SKU
M6	13,0	24,0	6,0	11,0	1000	3626C



Bülte England
37B Basepoint Centre Harts Farm Way Havant Hampshire PO9 1HS