
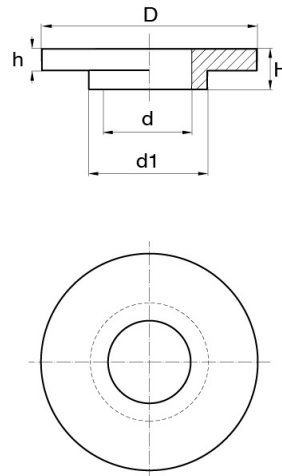


Metric screw insulators

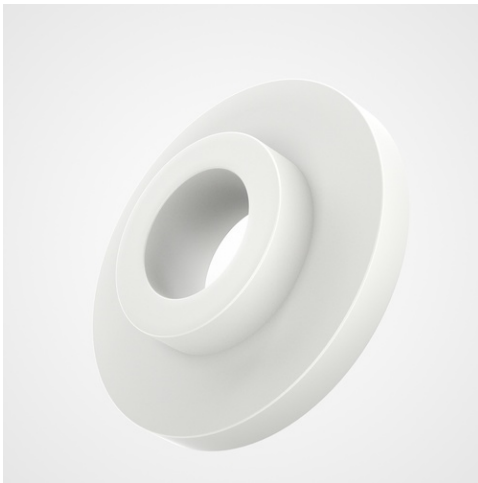

Details du produit

Description

Primarily intended as isolation between a screw and component of a different material, steel and glass for instance, or to stop damage to lightweight materials when fixed with screws, these insulators could also be used as bearings in lightly loaded applications.

Advantages

They are lightweight and corrosion resistant.

Qualities

Insulates and isolates in one.

usage

Used in all areas of industry including construction, lightweight machinery and office furniture.

d	d1	D	h	L	Minimum sales Quantity	SKU
3,2	3,9	6,0	2,0	3,5	1000	CI3260392A
3,2	3,9	6,0	3,0	4,5	1000	CI3260393A
3,2	3,9	6,0	4,0	5,5	1000	CI3260394A
3,2	3,9	6,0	5,0	6,5	1000	CI3260395A
3,2	4,9	6,0	2,0	3,5	1000	CI3260492A
3,2	4,9	6,0	3,0	4,5	1000	CI3260493A
3,2	4,9	6,0	4,0	5,5	1000	CI3260494A

d	d1	D	h	L	Minimum sales Quantity	SKU
3,2	4,9	6,0	5,0	6,5	1000	CI3260495A
4,3	5,9	8,0	2,0	3,5	1000	CI4380592A
4,3	5,9	8,0	3,0	4,5	1000	CI4380593A
4,3	5,9	8,0	4,0	5,5	1000	CI4380594A
4,3	5,9	8,0	5,0	6,5	1000	CI4380595A
5,3	6,9	10,0	2,0	3,5	1000	CI53100692A
5,3	6,9	10,0	3,0	4,5	1000	CI53100693A
5,3	6,9	10,0	4,0	5,5	1000	CI53100694A
5,3	6,9	10,0	5,0	6,5	1000	CI53100695A
5,3	7,9	15,0	2,0	3,5	1000	CI53150792A
5,3	7,9	15,0	3,0	4,5	1000	CI53150793A
5,3	7,9	15,0	4,0	5,5	1000	CI53150794A
5,3	7,9	15,0	5,0	6,5	1000	CI53150795A
6,4	8,9	12,5	2,0	3,5	1000	CI64125892A
6,4	8,9	12,5	3,0	4,5	1000	CI64125893A
6,4	8,9	12,5	4,0	5,5	1000	CI64125894A
6,4	8,9	12,5	5,0	6,5	1000	CI64125895A
8,4	10,9	17,0	2,0	3,5	1000	CI841701092A
8,4	10,9	17,0	3,0	4,5	1000	CI841701093A
8,4	10,9	17,0	4,0	5,5	1000	CI841701094A
8,4	10,9	17,0	5,0	6,5	1000	CI841701095A

d	dI	D	h	L	Minimum sales Quantity	SKU
8,4	10,9	25,0	2,0	3,5	1000	CI842501092A
8,4	10,9	25,0	3,0	4,5	1000	CI842501093A
8,4	10,9	25,0	4,0	5,5	1000	CI842501094A
8,4	10,9	25,0	5,0	6,5	1000	CI842501095A



Bülte England

37B Basepoint Centre Harts Farm Way Havant Hampshire PO9 1HS