


# Washer faced knurled thumb screws

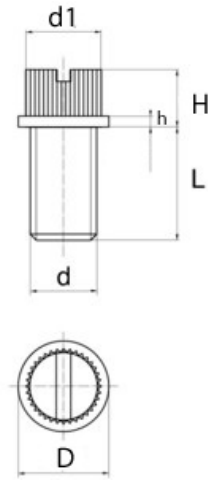

## Details du produit

### Description

The flanged knurled screw offers the possibility of two types of tightening. Its knurling allows easy manual tightening and the slot also gives the possibility of using a tool for even more optimal tightening.

### Advantages

Two clamping possibilities which allow to adapt to any type of assembly. In addition, the base under the head allows perfect stability of the screw.

### Qualities

Lightweight, robust, easy to use. Anticorrosion, perfect electrical insulator and anti thermal bridge.

### usage

Use in manual tightening or with tool. The flanged knurled head screw can be used for adjustment and tightening in all of your assemblies.

| d  | d1  | D   | h   | H   | L    | Minimum sales Quantity | SKU         |
|----|-----|-----|-----|-----|------|------------------------|-------------|
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 10,0 | 1000                   | VTME410A    |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 12,0 | 1000                   | VTME412A    |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 15,0 | 10000                  | VTME415/10A |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 16,0 | 1000                   | VTME416A    |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 17,0 | 10000                  | VTME417/12A |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 20,0 | 1000                   | VTME420A    |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 25,0 | 1000                   | VTME425A    |

| d  | dI  | D   | h   | H   | L    | Minimum sales Quantity | SKU         |
|----|-----|-----|-----|-----|------|------------------------|-------------|
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 30,0 | 1000                   | VTME430/25A |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 6,0  | 1000                   | VTME46A     |
| M4 | 6,4 | 7,7 | 0,8 | 5,0 | 8,0  | 1000                   | VTME48A     |
| M5 | 6,4 | 7,7 | 0,8 | 5,0 | 10,0 | 1000                   | VTME510A    |
| M5 | 6,4 | 7,7 | 0,8 | 5,0 | 12,0 | 1000                   | VTME512A    |
| M5 | 6,4 | 7,7 | 0,8 | 5,0 | 16,0 | 1000                   | VTME516A    |
| M5 | 6,4 | 7,7 | 0,8 | 5,0 | 20,0 | 1000                   | VTME520A    |
| M5 | 6,4 | 7,7 | 0,8 | 5,0 | 25,0 | 1000                   | VTME525A    |
| M5 | 6,4 | 7,7 | 0,8 | 5,0 | 6,0  | 1000                   | VTME56A     |
| M5 | 6,4 | 7,7 | 0,8 | 5,0 | 8,0  | 1000                   | VTME58A     |
| M6 | 6,4 | 7,7 | 0,8 | 5,0 | 10,0 | 1000                   | VTME610A    |
| M6 | 6,4 | 7,7 | 0,8 | 5,0 | 12,0 | 1000                   | VTME612A    |
| M6 | 6,4 | 7,7 | 0,8 | 5,0 | 16,0 | 1000                   | VTME616A    |
| M6 | 6,4 | 7,7 | 0,8 | 5,0 | 20,0 | 1000                   | VTME620A    |
| M6 | 6,4 | 7,7 | 0,8 | 5,0 | 25,0 | 1000                   | VTME625A    |
| M6 | 6,4 | 7,7 | 0,8 | 5,0 | 6,0  | 1000                   | VTME66A     |
| M6 | 6,4 | 7,7 | 0,8 | 5,0 | 8,0  | 1000                   | VTME68A     |

