


Knurled thumb screws PLAS 84

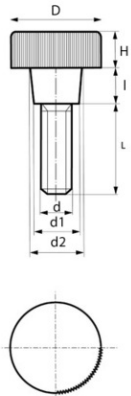

Details du produit

Description

This is a knurled screw with a diameter of 10 mm. Its base provides ideal support in terms of stability, resistance and insulation. Our standard is the natural polyamid.

Advantages

No tools required for its use. Thanks to its knurled head, it has a good grip for manual tightening.

Qualities

Easy to use with its manual tightening, it is light and robust. Resistant, insulating and anticorrosion. The thread is integral up to 80 mm for the majority of screws.

usage

The flanged knurled head screw can be used for adjustment and tightening in all of your assemblies.

d	d1	d2	D	H	I	L	Minimum sales Quantity	SKU
M4	7,8	8,6	10,0	4,0	5,0	10,0	5000	PLAS84410A
M4	7,8	8,6	10,0	4,0	5,0	12,0	5000	PLAS84412A
M4	7,8	8,6	10,0	4,0	5,0	16,0	5000	PLAS84416A
M4	7,8	8,6	10,0	4,0	5,0	20,0	5000	PLAS84420A
M4	7,8	8,6	10,0	4,0	5,0	25,0	5000	PLAS84425A
M4	7,8	8,6	10,0	4,0	5,0	6,0	5000	PLAS8446A
M4	7,8	8,6	10,0	4,0	5,0	8,0	5000	PLAS8448A

d	d1	d2	D	H	I	L	Minimum sales Quantity	SKU
M5	7,8	8,6	10,0	4,0	5,0	10,0	5000	PLAS84510A
M5	7,8	8,6	10,0	4,0	5,0	12,0	5000	PLAS84512A
M5	7,8	8,6	10,0	4,0	5,0	16,0	5000	PLAS84516A
M5	7,8	8,6	10,0	4,0	5,0	20,0	5000	PLAS84520A
M5	7,8	8,6	10,0	4,0	5,0	25,0	5000	PLAS84525A
M5	7,8	8,6	10,0	4,0	5,0	6,0	5000	PLAS8456A
M5	7,8	8,6	10,0	4,0	5,0	8,0	5000	PLAS8458A
M6	7,8	8,6	10,0	4,0	5,0	10,0	5000	PLAS84610A
M6	7,8	8,6	10,0	4,0	5,0	12,0	5000	PLAS84612A
M6	7,8	8,6	10,0	4,0	5,0	16,0	5000	PLAS84616A
M6	7,8	8,6	10,0	4,0	5,0	20,0	5000	PLAS84620A
M6	7,8	8,6	10,0	4,0	5,0	25,0	5000	PLAS84625A
M6	7,8	8,6	10,0	4,0	5,0	6,0	5000	PLAS8466A
M6	7,8	8,6	10,0	4,0	5,0	8,0	5000	PLAS8468A



Bülte England

37B Basepoint Centre Harts Farm Way Havant Hampshire PO9 1HS