
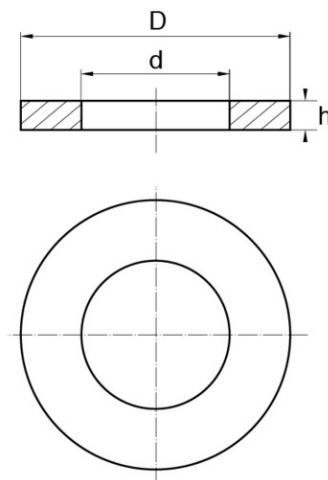


NEO washers

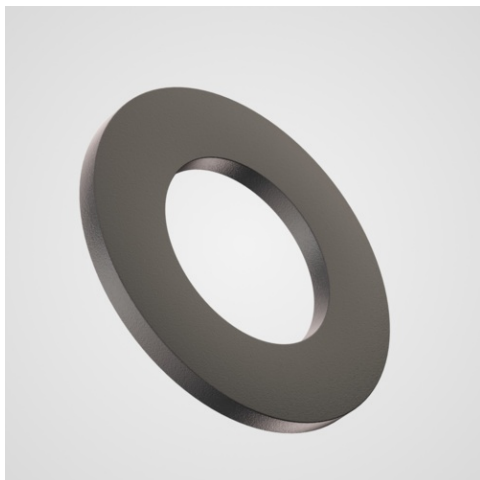

Details du produit

Description

Ideal as a washer in applications requiring a more flexible material. They create a tighter seal than harder plastic and nylon washers, and have a tensile strength of 6MPa.

Advantages

They are resistant to elongation and tear by 200-300% depending on the hardness. Our standard material is between 45 and 65 shore.

Qualities

Neoprene rubber is a flexible material which has resistance to many elements such as water, ozone and hydrocarbons.

usage

Most often used in plumbing, engineering and construction where a flexible seal is required.

d	D	h	M	Minimum sales Quantity	SKU
10,5	21,0	1,5	10	1000	RNEO10.5CW
13,0	24,0	2,0	12	1000	RNEO130CW
17,0	30,0	2,0	16	1000	RNEO170CW
19,0	34,0	3,0	18	1000	RNEO190CW
21,0	37,0	3,0	20	1000	RNEO210CW
3,2	7,0	0,5	3	1000	RNEO3.2CW
4,3	9,0	1,0	4	1000	RNEO4.3CW

d	D	h	M	Minimum sales Quantity	SKU
5,3	10,0	1,0	5	1000	RNEO5.3CW
6,4	12,5	1,0	6	1000	RNEO6.4CW
8,4	17,0	1,5	8	1000	RNEO8.4CW



Bülte England
37B Basepoint Centre Harts Farm Way Havant Hampshire PO9 1HS