


STB retaining rings

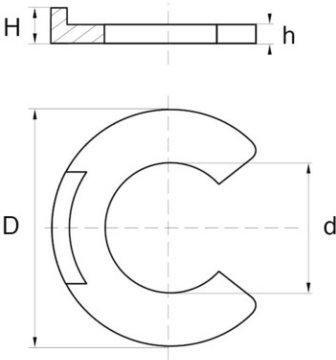

Details du produit

Description

These lipped retaining rings are designed to lock grooved shafts and axles into position. The lip is a useful aid to removal. Manufactured in Polyacetal (POM) for corrosion resistance and resistance to cleaning fluids.

Advantages

These POM retaining rings have a low coefficient of friction and are strong, rigid and tough

Qualities

Easy to fit and remove

usage

For use throughout industry where ever shafts and axles are used.

d	d1	D	h	H	Minimum sales Quantity	SKU
12,0	13-18	23,0	1,6	1,7	1000	STB160212DN
2,3	3-4	6,0	1,0	1,05	1000	STB160223DN
3,2	4-5	7,0	1,0	1,4	1000	STB160232DN
4,0	5-7	9,0	1,1	1,15	1000	STB16024DN
5,0	6-8	11,0	1,1	1,6	1000	STB16025DN
7,0	8-11	14,0	1,3	1,8	1000	STB16027DN
9,0	10-14	18,5	1,4	2,1	1000	STB16029DN



Bülte England

37B Basepoint Centre Harts Farm Way Havant Hampshire PO9 1HS