


Washers DIN 433

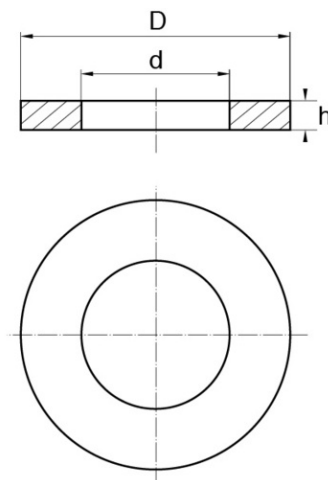

Details du produit

Description

The standard washer DIN 433 or ISO 7092 is a narrow washer that is used to distribute the force of the head of a screw or a nut on a bearing surface. The standard material at Bülte is natural polyamide. In order to best meet your needs, we can also offer this washer as standard in Pressboard and Hard Paper. We can also provide you other materials on request: PE, PP, POM, PC, PVDF, Nylon filled with glass fiber, ...

Advantages

This range of washers protects surfaces and provides good electrical insulation. They resist corrosion and most diluted acids. Its major difference is its smaller outside diameter.

Qualities

Designed primarily for use with cheese head screws with its smaller O/D, this flat washer is also used with socket head cap screws for the same reason. They also absorb shocks and vibrations. In addition, it provides UL 94-V2 combustability.

usage

The DIN 433 standard washer is adopted in several sectors of activity, including aeronautics, railways, electronics and electricity. Please note : Illustrations are not contractual.

d	D	h	M	Minimum sales Quantity	SKU
10,5	18,0	1,6	10	1000	43310A
10,5	18,0	1,5	10	1000	43310HP
10,5	18,0	1,5	10	1000	43310J
10,5	18,0	1,5	10	1000	43310PSP
13,0	20,0	2,0	12	1000	43312A
13,0	20,0	2,0	12	1000	43312HP

d	D	h	M	Minimum sales Quantity	SKU
13,0	20,0	2,0	12	1000	43312J
13,0	20,0	2,0	12	1000	43312PSP
15,0	24,0	2,5	14	500	43314A
15,0	24,0	2,5	14	1000	43314HP
15,0	24,0	2,5	14	1000	43314J
15,0	24,0	2,5	14	1000	43314PSP
17,0	28,0	2,5	16	500	43316A
17,0	28,0	2,5	16	1000	43316HP
17,0	28,0	2,5	16	500	43316J
17,0	28,0	2,5	16	1000	43316PSP
19,0	30,0	2,5	18	500	43318A
19,0	30,0	2,5	18	1000	43318HP
19,0	30,0	2,5	18	500	43318J
19,0	30,0	2,5	18	1000	43318PSP
2,7	5,0	0,5	2,5	1000	4332.5A
2,7	5,0	0,5	2,5	1000	4332.5J
2,7	5,0	0,5	2,5	1000	4332.5PSP
21,0	34,0	3,0	20	500	43320A
21,0	34,0	3,0	20	1000	43320HP
21,0	34,0	3,0	20	500	43320J
21,0	34,0	3,0	20	1000	43320PSP

d	D	h	M	Minimum sales Quantity	SKU
25,5	40,0	4,0	24	500	43324A
2,2	4,5	0,3	2	1000	4332A
2,2	4,5	0,3	2	1000	4332HP
2,2	4,5	0,3	2	1000	4332J
2,2	4,5	0,3	2	1000	4332PSP
3,7	7,0	0,5	3,5	1000	4333.5A
31,0	50,0	4,0	30	500	43330A
37,0	60,0	5,0	36	500	43336A
3,2	6,0	0,5	3	1000	4333A
3,2	6,0	0,5	3	1000	4333HP
3,2	6,0	0,5	3	1000	4333J
3,2	6,0	0,5	3	1000	4333PSP
4,3	8,0	0,5	4	1000	4334A
4,3	8,0	0,5	4	1000	4334HP
4,3	8,0	0,5	4	1000	4334J
4,3	8,0	0,5	4	1000	4334PSP
5,3	9,0	1,0	5	1000	4335A
5,3	9,0	1,0	5	1000	4335HP
5,3	9,0	1,0	5	1000	4335J
5,3	9,0	1,0	5	1000	4335PSP
6,4	11,0	1,5	6	1000	4336A

d	D	h	M	Minimum sales Quantity	SKU
6,4	11,0	1,5	6	1000	4336HP
6,4	11,0	1,5	6	1000	4336J
6,4	11,0	1,5	6	1000	4336PSP
8,4	15,0	1,5	8	1000	4338A
8,4	15,0	1,5	8	1000	4338HP
8,4	15,0	1,5	8	1000	4338J
8,4	15,0	1,5	8	1000	4338PSP



Bülte England
37B Basepoint Centre Harts Farm Way Havant Hampshire PO9 1HS